




Technical Specification

LXR3742BBBM - 4 Gang 2 Way 10AX

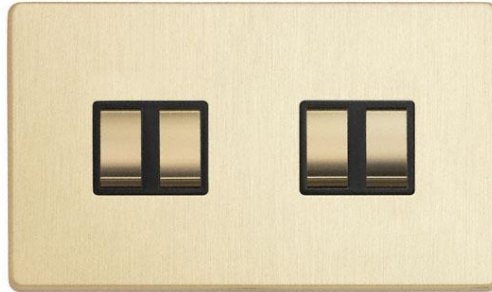

General

Box quantity: 1
GTIN-13 / EAN: 5056199052622
Total gross weight (g) includes packing: 190.00
Total net weight (g) excluding packaging: 185.00
Individual unit weight (g): 185.00
Width mm: 85.00
Height mm: 85.00
Depth mm: 25.00
Size/Dimensions (mm): 85X85X25
Surf area M²: 0.023

Technical

ABC indicator: B
Insert colour: black
Face plate finish: brushed brass
Rocker finish: brushed brass
Number of rockers: 4
Associated standards: BS EN 60669-1
Rated voltage: 220-250V
Rated current: 10AX
Frequency: 50-60Hz
Wiring system: 1 pole
Min. switch contact gap: 3mm
Ambient operating temperature:
-5 to 40°C (24hour average not exceeding 25°C)
Degree of protection: IP2X
Terminal capacity: 3 x 1.0mm 3 x 1.5mm 1 x 2.5mm
Face plate material: high grade electro plated stainless steel
Surface protection: lacquered
Minimum wall box depth: 25
Nature of supply: AC
Fixing screws: 2 x M3.5