




Technical Specification

LYR6356BSWM - 2 Gang 13A DP Switched Socket Brushed Steel White Insert Metal Rocker + USB 5v/4800mA

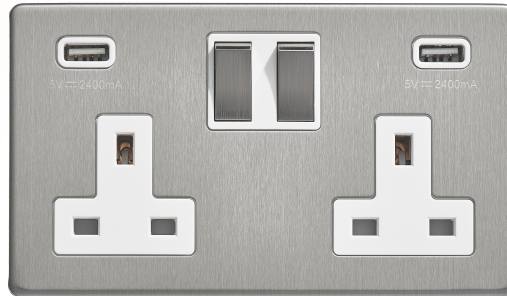

General

Box quantity: 1
GTIN-13 / EAN: 5056199055104
Total gross weight (g) includes packing: 324.00
Total net weight (g) excluding packaging: 317.00
Individual unit weight (g): 317.00
Width mm: 145.00
Height mm: 85.00
Depth mm: 30.00
Size/Dimensions (mm): 145X85X30
Surf area M²: 0.038

Technical

ABC indicator: A
Insert colour: white
Face plate finish: brushed steel
Rocker finish: brushed steel
Number of rockers: 2
Number of outlets: 2
Number of socket outlets switchable: 2
Associated standards: BS 1363-2 2016+A1:2018
Rated voltage: 220-250V
Rated current: 13A
Frequency: 50-60Hz
Wiring system: 2 pole
Min. switch contact gap: 3mm
Ambient operating temperature:
-5 to 40°C (24hour average not exceeding 25°C)
Degree of protection: IP2X
With built-in USB power supply: yes
Terminal capacity: 3 x 2.5mm 2 x 4.0mm 2 x 6.0mm
Face plate material: high grade stainless steel
Surface protection: lacquered
Minimum wall box depth: 35
Nature of supply: AC
Fixing screws: 2 x M3.5