




Technical Specification

X2832 - 3 Gang 20AX SP Switch

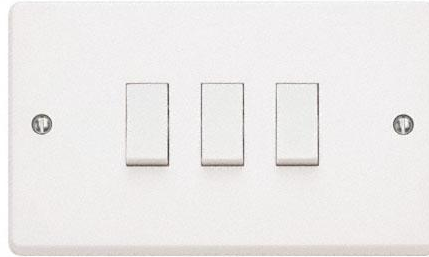

General

Box quantity: 5
GTIN-13 / EAN: 5056199077366
Total gross weight (g) includes packing: 1017.00
Total net weight (g) excluding packaging: 947.00
Individual unit weight (g): 189.00
Width mm: 145.00
Height mm: 85.00
Depth mm: 20.00
Size/Dimensions (mm): 145X85X20
Surf area M²: 0.034

Technical

ABC indicator: A
Colour: White
Face plate finish: moulded
Rocker finish: white moulded
Number of rockers: 3
Associated standards: BS EN 60669-1
Rated voltage: 220-250V
Rated current: 20AX
Frequency: 50-60Hz
Wiring system: 1 pole
Min. switch contact gap: 3mm
Ambient operating temperature:
-5 to 40°C (24hour average not exceeding 25°C)
Degree of protection: IP2X
Terminal capacity: 3 x 1.5mm 2 x 2.5mm 1 x 4.0mm
Face plate material: thermoset
Minimum wall box depth: 25
Nature of supply: AC
Fixing screws: 2 x M3.5